

Schedule of Services & Charges 2023

Minerals Services
Indonesia IDR



Providing services across the resources supply chain.

Intertek is a leading Total Quality Assurance provider to industries worldwide. Our network of more than 1,000 laboratories and offices and over 46,000 people in more than 100 countries, delivers innovative and bespoke Assurance, Testing, Inspection and Certification solutions for our customers' operations and supply chains. Intertek supports companies' success in the global marketplace, by helping customers to meet end users' expectations for safety, sustainability, performance, integrity and desirability in virtually any market worldwide.

Our network of mineral laboratories offer world class geochemical assay and testing services including sample preparation, fire assay and precious metal analysis, exploration geochemistry, environmental testing, mine-site laboratories, coal testing and inspection, consulting minerals inspection, robotics and automated laboratory systems.

**Quality analysis,
efficient, independent,
& cost-effective service.
Global scope, local presence.**

100 Countries.
1000 Laboratories.
44,000 Employees.



Intertek Minerals Global Centre of Excellence

A new technology and innovation centre with a focus on automation and sustainability to provide our clients with faster, safer, higher quality, and more efficient analytical solutions.

Minerals Global Centre of Excellence, is located in Perth, Western Australia, a key global centre for the minerals and mining industry. This new bespoke space consolidates Minerals operations into a 20,000sqm facility housing over 500 employees. The state-of-the-art laboratory will support our customers in the mining and minerals industry, giving them access to trusted expertise in mineral testing, inspections and analysis. Providing a broad portfolio of services under one roof significantly enhances delivery of our Total Quality Assurance (TQA) customer promise and streamlines our superior customer service.

The new facility was established to inspire innovation and sustainability across the minerals supply chain, with advanced technology, automation and robotics.



Robotics and Automation

As the leader in operating automated robotic laboratory systems for the mining industry, Intertek's new facility includes eight robotic automated systems, including sample preparation, XRF and wet chemistry systems. Utilising advanced technology and innovation with a strong focus on automation, Intertek provides our customers with faster, more efficient analytical options that increase production without compromising on quality.

Specialised testing services

- Supporting the industry to drive a low carbon society.
- Rare earth and alkali earth and battery metals utilising a range of cutting-edge geochemistry techniques.
- High-quality analysis of platinum group elements.
- Consultative customised solutions.

MineralSpace

A key feature of the new Intertek Minerals Global Centre of Excellence is MineralSpace, a unique multifunctional dedicated customer space. This collaborative, immersive and multiple configurational venue is available to our customers and industry bodies for presentations, technical seminars, workshops and events.

- Multiple configurable venue space.
- 4.8-metre interactive screen allowing 32 separate touchpoints.
- Instant access to our world-class technical experts and services.

Sustainability

True to our purpose, Bringing Quality, Safety and Sustainability to Life, this new facility features 3030 x330W solar panels making it one of largest rooftop solar installations in Western Australia. The facility will also capture and recycle laboratory wastewater to conserve this precious resource.



Technology and Innovation

Minalyzer CS

Partnering with Minalyze has allowed Intertek Minerals to install a Minalyzer CS into our Global Centre of Excellence allowing our clients geological data acquisition and access to related software for data visualisation.



Minalyzer CS is a scanner which is a contactless and non-destructive service that generates geochemistry, high-resolution images, rock quality designation (RQD), structures, specific gravity and bulk density for drill cores and other drill samples. The patented scanner is designed for handling large volumes of drill samples and is capable of scanning drill cores directly in core trays. A laser (LiDAR) generates a 3D-model of the topology of the core and trays, which enables the control and precision of the continuous XRF scanning. RQD and structures are also derived based on the 3D-model.

The objective, continuous and consistent nature of the datasets as well as the high but compact data density generated by the scanning technology is paramount in machine learning and deep learning applications and approaches to geology. Machine learning and deep learning have been demonstrated to be effectively used, based on the data from the scanning, for the prediction of host rock lithologies.

A range of datasets are available generated from one scan;

- **Photography:** High-resolution digital image of sample of spatial resolution of 12 pixels/mm with consistent light conditions.
- **Topography:** High-resolution grey scale or colored digital topology model of sample in 3D X,Y and Z point cloud format.
- **Chemical Analysis:** Continuous X-ray Fluorescence (XRF) analysis on 1 m, 10 cm and custom intervals. Elemental range between Sodium (Na) to Uranium (U) depending on settings.
- **Specific Gravity/Bulk Density:** Specific Gravity (SG) estimations using the X-SG method or bulk density using volumetric estimation depending on core type.
- **Rock Quality Designation:** Rock quality designation (RQD) on desired intervals. Client can generate it digitally by using Minalogger and designating which fractures are mechanical or natural.
- **Structural logging:** Measurement of Alpha and Beta angles on structural features. Client can measure it digitally by using Minalogger where core have orientation line, and Alpha angle could be measured on.

Access to the Minalyze cloud-based software www.minalogger.com can be provided for visualisation and generation of datasets through digital tools and allows for remote access to a digital version of the drill sample.



Chrysos PhotonAssay

Chrysos PhotonAssay
technology added to Minerals
Global Centre of Excellence
in Perth.



Intertek Minerals has partnered with Chrysos Corporation to install three Chrysos PhotonAssay units at the new Minerals Global Centre of Excellence.

Using much higher energies than traditional X-ray methods, Chrysos PhotonAssay detects and counts atoms of gold in as little as two minutes. PhotonAssay allows large samples to be measured and provides a true bulk reading independent of the chemical or physical form of the sample. Using uniquely numbered sample jars, the process is completely non-destructive, and all samples can be retained for further analysis or testing if required. The technology is also measurably safer and more environmentally friendly than previous assay processes, something that aligns with Intertek's stated purpose of bringing quality, safety, and sustainability to life.

For gold producers Chrysos PhotonAssay delivers faster, more accurate gold analysis on larger samples with lower costs.

- More representative sample analysis and results
- Improved definition of reserves and resources
- Lower labour requirements, less chance of human error and/or accident
- Reduced supply chain cost, reliance and management



Applications

MINING DEVELOPMENT PHASES →



The most common methods offered are listed in this Schedule, however this is not an exhaustive list of services and not all services are available at all locations, We encourage clients to discuss their projects with us and where possible visit the laboratories to assist with the selection of the most appropriate analytical solutions for the particular application.

Contents

10 Sample Preparation

- 11 Sample Submission
- 11 Sample Storage
- 11 Freight
- 11 Sample Preparation Packages
- 12 Sample Preparation Procedures

13 Precious Metals Analysis

- 14 Lead Collection Fire Assay
- 14 Screen Fire Assay
- 14 Nickel Sulphide Collection Fire Assay
- 14 Aqua Regia Digestion
- 15 Cyanide Leaches

16 Exploration Geochemistry

- 17 Aqua Regia Digestion Packages
- 19 Four Acid Digestion Multi-Element Analysis
- 20 Two Acid Digestion for Multi-Elements
- 20 Pressed Powder XRF for Trace Elements

21 Ores & Commodities

- 22 Ores and High Grade Materials
- 23 Specific Commodities
- 23 Iron Ore
- 23 Aluminium Ore (Bauxite)
- 24 Chromite Ore
- 25 Industrial Minerals
- 25 Copper

26 Individual Methods

- 27 Gravimetric Determinations
- 27 Carbon and Sulphur Analysis

28 Mineralogy

- 29 Mineralogy
- 29 Bulk Mineralogy
- 30 Infra-Red Spectroscopy
- 30 Micro Mineralogy

31 Additional Information

- 32 Sample Despatch
- 32 Importation of Samples into Indonesia
- 33 Service Fees and Surcharges
- 33 Quality Assurance
- 33 Ethics and Compliance
- 33 Occupational Health & Safety
- 34 Value Added Services
- 36 Conversion Tables
- 37 Periodic Table
- 38 Terms and Conditions
- 40 Locations

Sample Preparation

The production of a homogeneous sub-sample, representative of the material submitted to the laboratory is the primary purpose of sample preparation. Correct preparation is critical to obtaining meaningful analytical results. The selection of the actual sample preparation procedures will depend on the type and size of the sample, the mineralogy as well as the client's analytical and budgetary requirements.

Segregation into high and low grade sample preparation areas and utilisation of techniques such as vacuuming pulveriser vessels and/or quartz washes between samples reduces the potential for contamination. Robotic preparation employing quartz washes is also available at some facilities.

Close and ongoing consultation with your laboratory manager or sales representative will ensure that optimal sample preparation techniques are employed thus maximising the value added in the analytical process.



Sample Submission

Correct submission and receipt of samples is critical in retaining the integrity of the sample chain of custody and facilitating efficient processing of samples. Detailed instructions can be found on Page 32 and submission forms can be downloaded from the Intertek website www.intertek.com/minerals

Sample submission and freight information emailed prior to despatch will expedite the sample receipt process. Upon receipt, samples are issued with a unique barcode ID through the LIMS. Clients are encouraged to submit pre barcoded samples to enable efficient sample receipt and reconciliation.

Description	Price
Minimum invoice charge	Rp3,018,750
Processing fee	Rp431,250
Waste disposal fee	Rp3,600/sample

Sample Storage

All solid samples (assay pulps, bulk pulps and residues) will be stored without charge for 90 days after completion of analysis. After this time all samples will be stored at a daily rate until the client's written advice regarding return, collection or disposal is received.

Description	Code	Price
Storage of pulps	ST102	Rp24/pulp/day
Storage of bulk residues	ST202	Rp160/residue/day
Storage of coarse residue	ST203	Rp175/residue/day
Labour for handling pulps/residues	ST204	Rp400,000/m ³ (min \$25)
Disposal of pulps / residues	ST205	Rp1,000,000/m ³ (min \$70)
Packing of samples to be returned	RT201	POA

Samples submitted as liquids will be stored (at ambient temperature) without charge for 90 days after completion of analysis and then discarded unless advised otherwise in writing.

Freight

Freight expenses incurred will be passed on at cost.

Sample Preparation Packages

To facilitate easy selection of sample preparation procedures, commonly used techniques have been packaged together.

Partial Preparation Package

Description	Code	Price
Sort, dry (105°C), crush (95%<5mm), riffle split, pulverise 1.5kg (95%<75µm) up to 2.0kg	SP123	Rp76,125
Additional weight	SP124	Rp12,760/kg
Sort, dry (105°C), crush (95%<2mm), riffle split, pulverise 1.5 kg (95%<75µm) up to 2.0kg	SP132	Rp84,100
Additional weight	SP133	Rp17,545/kg

Total Preparation Package

Description	Code	Price
Sort, dry (105°C), pulverise all (95%<75µm) up to 1.5kg	SP111	Rp79,750
Additional weight	SP113	Rp23,925/kg

Soil and Stream Sediment

Description	Code	Price
Sort, dry (105°C), pulverise all (95%<75µm) up to 1.5kg	SP101	Rp58,000
Additional weight	SP103	Rp13,558/kg

Sample Preparation Procedures

Drying

Sample drying procedures will vary due to the sample type and mass, moisture content and analysis required.

Description	Code	Price
Sort and dry samples at 105°C	SD02	Rp7,975/kg
Sort and dry samples at 60°C	SD03	Rp11,962/kg

Crushing

Samples with a volume or dimensions exceeding that which the pulverising vessels can accommodate may require crushing and/or splitting prior to pulverising. Crushing may also be required to achieve an optimum particle size to split to a representative sub sample for further particle size reduction.

Description	Code	Price
Crush to ~5mm	CR07	Rp9,570/kg
Crush to ~2mm	CR02	Rp10,368/kg

Quartz wash packages are available on request.

Splitting

Splitting of samples may be done to achieve a more cost effective option in reducing the volume of sample for further particle size reduction steps.

Two types of splitters are used; the riffle splitter sometimes called a Jones Splitter and the Rotary Splitter. It is important to select the correct size splitter for the product being split, correct technique is also important in order that samples are split without introducing bias.

Description	Code	Price
Riffle splitting - Up to 6kg retain reject	RF02	Rp9,570/kg/sample
Rotary or arcual splitting	RS01	Rp11,962/kg/sample

Pulverising

Pulverising is carried out on crushed or fine products to achieve a fine homogeneous powder to enable small sub-samples to be taken for analysis that will be representative of the larger coarse sample. For most sample types at least 95% of material will be pulverised to 75µm or better.

All devices used in the crushing and pulverising of samples can impart trace levels of contaminants. Low chrome steel is often the preferred material of choice for pulverising vessels as the chrome and iron contamination is usually negligible compared with the levels commonly encountered in most geological materials.

Description	Code	Price
Fine pulverise, 95% < 75µm, up to 1.5kg	PU102	Rp36,602
Fine pulverise, 95% < 75µm, additional weight	PU104	Rp34,676

Sieving

Sieving may be performed on unprocessed samples to determine the mass distribution of the various size fractions or alternatively, on crushed or pulverised products to ascertain the effectiveness of the processes.

Description	Code	Price
Dry sieve specified mesh size 1 fraction	SV101	Rp17,545/kg
Dry sieve to specified mesh sizes additional fractions	SV101A	Rp8,772/kg/fraction
Wet sieve (retain oversize only)	SV102	Rp26,318
Wet sieve (recovering undersize & oversize)	SV102A	Rp55,825
Quality control check sizing - 75µm	SV203	Rp7,975/check
Quality control check sizing - 2mm	SV208	Rp7,975/check

Miscellaneous Procedures

Description	Code	Price
Client specified preparation	CP01	Rp478,500/hr
Roasting, pulp only up to 200g	PR01	Rp28,710
Reporting weights of samples, wet or dry	WT01	Rp9,570
Compositing / Homogenising <= 2kg	CM201	Rp38,280
Additional weight	CM202	Rp9,570

Other sample preparation processes (preparation of carbons, magnetic or heavy media separation, compositing & homogenising etc) are also available. Please contact the laboratory to discuss your requirements.

Precious Metals Analysis

A diverse range of precious metal analytical techniques are available for a wide range of applications ranging from grassroots exploration, where sub ppb sensitivities are required, to accurate resource estimation and grade control.

Lead collection fire assay remains the classic method for gold, platinum and palladium, however, aqua regia digestion, accelerated cyanide leach and BLEG (bulk leach extractable gold) are available for specific purposes. The full suite of platinum group elements can be quantified using nickel sulphide collection fire assay. Please contact us to discuss your specific requirements.



Lead Collection Fire Assay

Fire assay flux recipes have been carefully formulated to optimise precious metal recovery in diverse mineralogical matrices. Further flux modification and reduction in charge weight can be used to improve recoveries in difficult sample matrices.

Element	Description	Detection Limit	Code	Price
Au	30g fire assay / AAS	0.01ppm	FA30/AA	Rp149,132
Au	50g fire assay / AAS	0.01ppm	FA51/AA	Rp157,905
Au	50g fire assay / AAS	0.005ppm	FA50/AA	Rp166,678
Au	50g fire assay / GF AAS	1ppb	FA50/GF	Rp228,085
Pt, Pd	As additional element			Rp74,168 / element
Au	30g fire assay / Gravimetric	6ppm	FA30/GR200	Rp210,540
Au	50g fire assay / Gravimetric	3ppm	FA50/GR200	Rp228,085

*A Rp10,000 surcharge will apply for new pots

Concentrates, metallurgical and high grade samples

POA

Screen Fire Assay

Screen fire assays utilise a large sample mass, typically 1kg, and find application where the precious metal compositional and distributional heterogeneity in a pulp is such that a conventional fire assay would be accompanied by an unacceptable sampling error. The pulp sample is screened and the entire coarse fraction is fired assayed to recover the gold and/or PGEs. Duplicate assays are carried out on the more reproducible undersize fraction. The precious metal content is reported as a mass weighted mean along with the individual fractions' results.

Element	Description	Detection Limit	Code	Price
Au	Screen fire assay 106µm / AAS	0.01ppm	SF106/AA	Rp446,600
Au	Screen fire assay 75µm / AAS	0.01ppm	SF75/AA	Rp478,500
	Additional oversize firing			Rp166,678
Pt, Pd	Available on request			POA

Nickel Sulphide Collection Fire Assay

The specialised nickel sulphide collection fire assay method has been designed to quantitatively recover all of the platinum group elements. The precious metals are collected in a nickel sulphide matte which is dissolved leaving the Au and PGEs as a residue. This residue is filtered off, dissolved in aqua regia and read on an ICP-MS for low ppb detection limits.

Element	Description	Detection Limit	Code	Price
Au	25g NiS fire assay low level / ICP-MS	2ppb - 500ppb	NS25L/MS	POA
Pt, Pd, Rh, Ru, Ir, Os		1ppb - 500ppb		
Au	25g NiS fire assay ore grade / ICP-MS	5ppb - 100ppm	NS25H/MS	POA
Pt, Pd, Rh, Ru, Ir, Os				

Aqua Regia Digestion

Aqua regia is a low level, cost effective option for analysing gold and other elements in oxide, sulphide and carbonate minerals. It is an empirical method with tightly controlled digest conditions to optimise long term reproducibility. Refractory minerals and silicates may remain largely undigested. Pre roasting is required when samples contain appreciable non-carbonate carbon. Aqua regia digestion is a useful exploration tool and gold analysis can be coupled with multi element packages found under the Exploration Geochemistry section.

Element	Description	Detection Limit	Code	Price
Au	30g aqua regia / AAS	0.05ppm	AR30/AAS	Rp106,865
Au	50g aqua regia / AAS	0.02ppm	AR50/AAS	Rp115,638
	Pre-roasting (ashing) to remove graphitic / other organic material		R/	Rp28,710

Cyanide Leaches

Cyanide extractable gold analysis is used in a range of applications from identification of low level anomalies by BLEG in grassroots exploration to accelerated leaches mimicking metallurgical recovery processes.

BLEG (Bulk Leach Extractable Gold) - Low Level Gold

Element	Description	Detection Limit	Code	Price
Au	<5.0kg leach / AAS	0.1- 25ppb	CN5000/AAS	Rp350,900
Au	5.0 - 10.0kg leach / AAS	0.1- 25ppb	CN5000-1/AAS	Rp438,625
Ag, Cu	As additional element		/AA	Rp26,318 / element

BLEG (Bulk Cyanide Leach) - Zinc Collection Low Level Gold

Element	Description	Detection Limit	Code	Price
Au	2.0kg leach Zn collection / AAS	0.02ppb	CZ2000/AAS	Rp438,625
Au	5.0kg leach Zn collection / AAS	0.01ppb	CZ5000/AAS	Rp526,350
Au	>5.0kg leach Zn collection / AAS	0.01ppb	CZ5000-1/AAS	Rp614,075
Ag, Cu	As additional element		/AA	Rp26,318 / element

Accelerated Cyanide Leach LeachWELL™

High grade cyanide leaches utilise the LeachWELL™ accelerant to determine the cyanide extractable gold and provide an indication of potential recoveries in metallurgical processes and circuits. Recovery and analysis of the residues provide the option of reporting total gold values and thus determining the refractory gold fraction.

Element	Description	Detection Limit	Code	Price
Au	200g leach / AAS	0.01ppm	LW200/AA	Rp69,382
Ag	As an additional element	1ppm	/AA	Rp26,318 / element

Tail recovery, entire tail washed, reground and 25g fire assay Au

Element	Description	Detection Limit	Code	Price
Au	200g wash / grind / fire assay / AAS	0.01ppm	TR200/AA	Rp159,500

Cyanide Bottle Roll - Ore Grade

Element	Description	Detection Limit	Code	Price
Au	<1.0kg leach / AAS	0.01ppm	CNB1000/AAS	Rp263,175
Ag, Cu	As additional element		/AA	Rp26,318 / element

Other Cyanide Methods

Element	Description	Detection Limit	Code	Price
Au	5g leach / AAS	0.01ppm	CN5/AAS	Rp69,382

Exploration Geochemistry

The challenge of identifying geochemical anomalies related to concealed mineral deposits has driven innovation and development in analytical geochemistry.

Advances in instrumentation and methodology offer significant improvements in aligning detection limits with elemental crustal abundances and provide exceptional long term data reproducibility.

A number of exploration methods are offered including partial selective leaches, biogeochemical analyses, aqua regia digestions and near-total four acid digestions. The selection of the most appropriate method is critical to achieving the most successful outcome for your exploration project.

The most commonly used analytical procedures are listed, however this is not an exhaustive list and we encourage you to contact your local manager to discuss your specific requirements. Not all methods and packages listed are available at all locations.



Aqua Regia Digestion Packages

Aqua regia digestion coupled with ICP-OES and ICP-MS offers a cost effective option for gold and multi-element packages.

The 1g options are primarily intended as a multi-element scanning tool. The precious metal results may be indicative only and should be interpreted with caution owing to the deportment of these elements in geological many sample types. Larger sample masses (e.g. 10g or 25g) can offer a more reliable precious metal analysis. Individual elements are available on request.

0.5g Aqua Regia ICP-OES Package

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	0.1 - 200	K	0.01% - 10%	Se	5 - 2000
Al	0.01% - 10%	La	1 - 2000	Sn	5 - 2000
As	2 - 1%	Li	1 - 1%	Sr	1 - 2000
Ba	1 - 2000	Mg	0.01% - 10%	Ta	5 - 1000
Bi	2 - 2000	Mn	1 - 2%	Te	5 - 2000
Ca	0.01% - 10%	Mo	1 - 1%	Ti	0.01% - 1%
Cd	0.2 - 2000	Na	0.01% - 10%	V	1 - 4000
Co	1 - 1%	Nb	1 - 2000	W	10 - 2000
Cr	1 - 2%	Ni	1 - 1%	Y	1 - 2000
Cu	1 - 1%	Pb	2 - 1%	Zn	1 - 1%
Fe	0.01% - 10%	Sb	1 - 2000	Zr	1 - 2000
Ga	2 - 2000	Sc	1 - 2000		
Aqua regia digestion 0.5g / ICP-OES			AR005/OE01	Rp240,845	

1g Aqua Regia Standard ICP-OES & MS Package

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	0.05 - 250	Hg	0.05 - 100	S	100 - 5%
Al	20 - 10%	In	0.05 - 1000	Sb	0.05 - 5000
As	1 - 1%	K	20 - 5%	Sc	1 - 500
B	10 - 1%	La	0.01 - 500	Se	1 - 5000
Ba	1 - 2000	Li	0.1 - 1000	Sn	0.5 - 200
Be	0.5 - 1000	Mg	0.01% - 20%	Sr	0.2 - 5000
Bi	0.05 - 5000	Mn	1 - 1%	Ta	0.05 - 200
Ca	0.01% - 40%	Mo	0.1 - 5000	Te	0.05 - 1000
Cd	0.05 - 1000	Na	0.01% - 5%	Th	0.05 - 500
Ce	0.01 - 1000	Nb	0.2 - 200	Ti	5 - 1000
Co	0.1 - 5000	Ni	1 - 2%	Tl	0.05 - 1000
Cr	1 - 1%	P	20 - 2%	U	0.05 - 5000
Cs	0.02 - 500	Pb	0.5 - 5000	V	2 - 1000
Cu	1 - 2%	Pd*	10ppb - 500pp	W	0.1 - 200
Fe	0.01% - 50%	Pt*	5ppb - 500ppb	Y	0.05 - 200
Ga	0.1 - 500	Rb	0.05 - 1000	Zn	1 - 2%
Hf	0.05 - 200	Re	0.05 - 500	Zr	0.5 - 200
Aqua regia digestion 1g / ICP-OES & ICP-MS			AR01/OM210	Rp542,300	

Note: * Pt, Pd are indicative only on 1g option and must be interpreted with extreme caution

Legend

Complete recovery for most samples

Near complete recovery for most samples

Not complete recovery

Aqua Regia Comprehensive ICP-OES & MS Package - Ultra Trace Levels

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	0.05 - 250	Hg	0.01 - 100	S	50 - 5%
Al	20 - 10%	Ho	0.01 - 200	Sb	0.02 - 5000
As	1 - 1%	In	0.005 - 1000	Sc	0.1 - 500
B	10 - 1%	K	20 - 5%	Se	1 - 5000
Ba	1 - 2000	La	0.01 - 500	Sm	0.01 - 500
Be	0.05 - 1000	Li	0.1 - 1000	Sn	0.05 - 200
Bi	0.01 - 5000	Lu	0.005 - 200	Sr	0.02 - 5000
Ca	0.01% - 40%	Mg	0.01% - 20%	Ta	0.01 - 200
Cd	0.01 - 1000	Mn	1 - 1%	Tb	0.005 - 200
Ce	0.01 - 1000	Mo	0.1 - 5000	Te	0.01 - 1000
Co	0.1 - 5000	Na	0.01% - 5%	Th	0.01 - 500
Cr	1 - 1%	Nb	0.02 - 200	Ti	5 - 1000
Cs	0.01 - 500	Nd	0.01 - 500	Tl	0.01 - 1000
Cu	0.5 - 2%	Ni	0.5 - 2%	Tm	0.01 - 100
Dy	0.01 - 200	P	20 - 2%	U	0.01 - 5000
Er	0.01 - 200	Pb	0.5 - 5000	V	2 - 1000
Eu	0.01 - 200	Pd*	10ppb - 500ppb	W	0.05 - 200
Fe	0.01% - 50%	Pr	0.005 - 500	Y	0.02 - 200
Ga	0.05 - 500	Pt*	5ppb - 500pp	Yb	0.01 - 200
Gd	0.05 - 200	Rb	0.02 - 1000	Zn	1 - 2%
Hf	0.01 - 200	Re	0.001 - 500	Zr	0.1 - 200
Aqua regia digestion 1g / ICP-OES & ICP-MS			AR01/OM200	Rp781,550	

Note: * Pt, Pd are indicative only on 1g option and must be interpreted with extreme caution

A selection of individual elements and customised packages are offered to suit your specific needs, or where only a few elements are required. Please consult your local manager for details.

Elements where the concentration exceeds the upper limit will be re-digested by the appropriate analytical method which will incur additional charges.

Legend

Complete recovery for most samples

Near complete recovery for most samples

Not complete recovery

Four Acid Digestion Multi-Element Analysis

Four acid digestion offers a “near total” dissolution of almost all minerals species, targeting silicates not dissolved in less aggressive aqua regia digests. Carefully staged digestion steps minimise losses due to volatilisation of some elements.

Highly resistant refractory minerals such as zircon, cassiterite, columbite-tantalite, ilmenite, xenotime rutile, barite and wolframite will require a fusion digestion to guarantee complete dissolution.

Packages range from basic ICP-OES only suites through to a comprehensive element list utilising both ICP-OES and ICP-MS for ultra-trace levels. Individual elements are available on request.

Four Acid ICP-OES Package

Element	Range ppm		Element	Range ppm		Element	Range ppm	
Ag	0.5	- 500	K	20	- 10%	Sb	5	- 1%
Al	50	- 15%	La	20	- 5000	Sc	1	- 5000
As	10	- 2000	Li	1	- 2000	Sn	5	- 2000
Ba	2	- 5000	Mg	20	- 40%	Sr	1	- 1%
Bi	5	- 1%	Mn	1	- 1%	Te	5	- 2000
Ca	50	- 40%	Mo	2	- 1%	Ti	5	- 1%
Cd	0.5	- 2000	Na	20	- 10%	V	1	- 5000
Co	1	- 1%	Ni	1	- 1%	W	5	- 2000
Cr	5	- 1%	P	50	- 5%	Zn	1	- 1%
Cu	1	- 1%	Pb	5	- 1%			
Fe	100	- 50%	S	50	- 10%			
Acid digestion			4A/OE01			Rp350,900		

Four Acid Standard ICP-OES & MS Package

Element	Range ppm		Element	Range ppm		Element	Range ppm	
Ag	0.1	- 500	In	0.05	- 2000	Se	2	- 1%
Al	50	- 15%	K	20	- 10%	Sn	0.1	- 2000
As	2	- 2000	Li	0.1	- 2000	Sr	0.5	- 1%
Ba	1	- 5000	Mg	20	- 40%	Ta	0.05	- 2000
Be	0.5	- 2000	Mn	1	- 1%	Te	0.1	- 2000
Bi	0.05	- 1%	Mo	0.1	- 1%	Th	0.05	- 5000
Ca	50	- 40%	Na	20	- 10%	Ti	5	- 1%
Cd	0.05	- 2000	Nb	0.1	- 2000	Tl	0.02	- 2000
Co	0.1	- 1%	Ni	1	- 1%	U	0.05	- 1%
Cr	5	- 1%	P	50	- 5%	V	1	- 5000
Cs	0.1	- 2000	Pb	1	- 1%	W	0.1	- 2000
Cu	1	- 1%	Rb	0.1	- 2000	Y	0.1	- 2000
Fe	100	- 50%	Re	0.05	- 2000	Zn	1	- 1%
Ga	0.1	- 2000	S	50	- 10%	Zr	0.5	- 2000
Ge	0.1	- 2000	Sb	0.1	- 1%			
Hf	0.1	- 2000	Sc	1	- 5000			
			4A/OM10			Rp638,000		

A selection of individual elements and customised packages are offered to suit your specific needs, or where only a few elements are required.

Elements where the concentration exceeds the upper limit will be re-digested by the appropriate analytical method which will incur additional charges.

Two Acid Digestion for Multi-Elements

This digest features a high temperature perchloric acid oxidative attack with a hydrochloric acid final leach that is suitable for the analysis of many base metal oxides and sulphides, however silicates and refractory minerals may only be partially attacked. Quantification is offered by an AAS finish.

This digest provides a useful scanning tool. Upper limits are relatively low for some elements, after which re-analysis by a more appropriate method is required.

Two Acid AAS Individual Elements

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	1 - 100	Cr	10 - 1%	Ni	4 - 1%
As	50 - 1%	Cu	2 - 1%	Pb	4 - 4000
Cd	4 - 1%	Fe	0.01% - 8%	V	10 - 1%
Co	4 - 1%	Mn	5 - 1%	Zn	1 - 1%

Description	Code	Price
2 acid digestion / AAS first element C_2H_2	2A/AA201	Rp42,268
/ per additional element C_2H_2		Rp14,355
2 acid digestion / AAS first element N_2O	2A/AA202	Rp47,850
/ per additional element N_2O		Rp19,140

Pressed Powder XRF for Trace Elements

Pressed powder XRF is a useful technique for the rapid analysis of trace to minor quantities of single elements using quick matrix correction. The pulverised sample is mixed with a binder and pressed into a briquette which removes the need for digestion and facilitates the analysis of elements present in refractory minerals. Control of grinding parameters reduces errors due to particle size and mineralogical effects.

The pressed powder method is suitable for light matrices. Samples may be diluted with silica to expand the range and reduce matrix effects.

Element	Range ppm	Element	Range ppm	Element	Range ppm
As	1 - 5000	Sb	3 - 5000	Tl	4 - 5000
Ba	10 - 5000	Se	4 - 5000	W	5 - 5000
Bi	10 - 5000	Sn	3 - 5000	Zr	5 - 5000
Mo	1 - 5000	Ta	4 - 5000		
Pb	10 - 5000	Te	5 - 5000		

Description	Code	Price
Pressed powder / XRF including first element	PP/XRF201	Rp79,750
/ per additional element		Rp26,318
Over range elements, dilution including first element	PP/XRF202	Rp95,700
/ per additional element		Rp26,318

Legend

Complete recovery for most samples

Near complete recovery for most samples

Not complete recovery

Ores & Commodities

A diverse suite of procedures provide optimum precision and accuracy of the target element typically required in advanced exploration and resource evaluation. Techniques include multi-acid and fusion digests, useful for characterisation of geological samples where total dissolution of the sample is required, coupled with ICP-OES, ICP-MS and XRF instrumentation.

Trade commercial grade sample analysis where results are used for umpire or commercial settlement are available on request, see the Minerals Trade Services section on page 34.



Ores and High Grade Materials

Acid Digestion

High grade sulphide ores are readily quantified using a 4 acid digest formulated to retain low-solubility elements such as Pb and Ag in solution at higher concentrations. This is a near total dissolution however elements incorporated in high refractory minerals may not be completely digested.

Four Acid Ore Grade AAS Individual Elements

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	5	Cu	0.01	Pb	0.01
Cd	5	Fe	0.01	Zn	0.01
Co	0.01	Ni	0.01		
Ore grade 4 acid digest / AAS first element			4AH2/AA	Rp153,918	
/ per additional element				Rp26,318	

Four Acid Ore Grade ICP-OES Package

Element	Range ppm	Element	Range ppm	Element	Range ppm
Ag	0.5	K	0.01%	Sn	10
Al	0.01%	La	1	Sr	1
As	5	Li	1	S	50
Ba	2	Mg	0.01%	Ta	5
Bi	5	Mn	2	Te	10
Ca	0.01%	Mo	1	Ti	0.01%
Cd	1	Na	0.01%	V	1
Co	2	Nb	5	W	10
Cr	2	Ni	1	Y	1
Cu	2	Pb	2	Zn	2
Fe	0.01%	Sb	5	Zr	5
Ga	10	Sc	2		
ICP-OES package		4 acid ore grade digestion	4AH2/OE201	Rp290.290	

Four Acid Ore Grade ICP-OES Individual Elements

ICP-OES elements are available individually. Please see table above for elements and detection limits.

Description	Code	Price
Four Acid Ore Grade	4AH2/OM	Rp166,678
/ ICP-OES first element		Rp8,772
/ per additional element		

Specialised and Classical Methods

Analyte	Description	Code	Price
Acid soluble Cu	Dilute H ₂ SO ₄ leach / AAS	AS/AA	Rp89,320
Cyanide soluble Cu	Ambient temperature cyanide leach / AAS	CU1/AA	Rp69,382
Cu in Cu concentrates	Short iodide titration	CU2/VOL	Rp398,750
Zn in Zn concentrates	EDTA titration	ZN1/VOL	Rp478,500

Legend

Complete recovery for most samples

Near complete recovery for most samples

Not complete recovery

Specific Commodities

Iron Ore

X-ray fluorescence spectroscopy (XRF) is the preferred method of analysis for iron ore samples. Accuracy, long term reproducibility and high throughput means XRF is unparalleled in the modern geochemical laboratory for the analysis of the major components of iron ores.

Pulverised samples are fused with a lithium borate flux and cast into disks using semi or fully automated technology. The use of fusion disks eliminates physical effects such as particle size and reduces matrix effects which can compromise the accuracy of XRF analysis. High quality data is produced using either simultaneous or sequential wavelength dispersive instrumentation.

Single point Loss on Ignition (LOI) is determined at 1000°C and is included in the analytical package rate. Customised multiple point LOI analysis, as determined by Thermo Gravimetric Analysis(TGA), are available on request.

Basic Iron Ore XRF Package

Suitable for exploration and resource modeling this suite is intended to quantify the essential major and minor oxide components of an iron ore sample.

Element	Range %	Element	Range %	Element	Range %
Fe ₂ O ₃	0.01 - 100	MgO	0.01 - 100	SiO ₂	0.01 - 100
Al ₂ O ₃	0.01 - 100	MnO	0.01 - 100	TiO ₂	0.01 - 100
CaO	0.01 - 100	Na ₂ O	0.01 - 100	V ₂ O ₅	0.005 - 10
Cr ₂ O ₃	0.005 - 10	P	0.001 - 45	LOI 1000°C	0.01 - 100
K ₂ O	0.01 - 100	S	0.001 - 2		
Li borate fusion / XRF			FB1/XRF210	Rp574,998	
Additional LOI			FB1/XRF210-1	Rp41,071	

Extended Suite Packages

Suitable for exploration and resource modeling as well as quantification of additional accessory and deleterious elements. These elements are less abundant in most iron ores however, they may affect the quality of the ore if present in significant quantities.

Iron Ore Extended Suite - Standard Detection Limits XRF Package

Element	Range %	Element	Range %	Element	Range %
Fe ₂ O ₃	0.01 - 100	Cu	0.005 - 2	S	0.001 - 2
Al ₂ O ₃	0.01 - 100	K ₂ O	0.01 - 100	SiO ₂	0.01 - 100
As	0.005 - 5	MgO	0.01 - 100	Sn	0.005 - 5
BaO	0.005 - 5	MnO	0.01 - 100	TiO ₂	0.01 - 100
CaO	0.01 - 100	Na ₂ O	0.01 - 100	V ₂ O ₅	0.005 - 10
Cl	0.005 - 5	Ni	0.005 - 20	Zn	0.005 - 2
Co	0.005 - 5	P	0.001 - 45	LOI 1000°C	0.01 - 100
Cr ₂ O ₃	0.005 - 10	Pb	0.005 - 2		
Li borate fusion / XRF			FB1/XRF11	Rp657,140	
Multiple point LOI per additional temperature point			FB1/XRF11-1	Rp41,071	

Multi-point LOI values are cumulative unless requested otherwise.

Aluminium Ore (Bauxite)

XRF analysis of bauxite is the preferred method to return total values of the component oxides such as alumina and silica. A single point LOI is done at 1000°C. As bauxites are highly hygroscopic, all data is corrected to the dry sample.

Of more fundamental importance are the available alumina and reactive silica components of the bauxite ores. The available alumina is the alumina component that can be extracted using the sodium hydroxide leaching Bayer process. The reactive silica is the silica component that dissolves in the Bayer process and reacts with some of the dissolved alumina and sodium hydroxide, whereby both alumina and sodium are lost to the process. Reactive silica and available alumina are determined in the Perth dedicated bauxite analysis facility.

Bauxite XRF Package

Element	Range %	Element	Range %	Element	Range %
Al ₂ O ₃	0.01 - 100	MgO	0.01 - 100	TiO ₂	0.01 - 100
BaO	0.01 - 100	MnO	0.01 - 100	V ₂ O ₅	0.005 - 100
CaO	0.01 - 100	Na ₂ O	0.01 - 100	ZrO ₂	0.01 - 100
Cr ₂ O ₃	0.005 - 100	P ₂ O ₅	0.002 - 100	LOI 1000°C	0.01 - 100
Fe ₂ O ₃	0.01 - 100	SiO ₂	0.01 - 100		
K ₂ O	0.01 - 100	S	0.002 - 2		
Li borate fusion / XRF			FB1/XRF230	Rp459,998	

Chromium Ore

Chromium ores are usually found associated with ultramafic rocks and may be accurately analysed by fusion XRF with a single point LOI (1000°C). The highly refractory nature of chromite ores requires a specialist approach in the fusion process to ensure that the spinel structure is decomposed and the entire sample is dissolved in the fusion disk. The LOI is usually negative in higher grade ores due to the oxidation of ferrous iron in the spinel structure. The major element analysis can be used to classify the chromite ore.

Chromite Ore XRF Package

Element	Range %	Element	Range %	Element	Range %
Cr ₂ O ₃	0.005 - 100	MgO	0.01 - 100	S	0.002 - 2
Al ₂ O ₃	0.01 - 100	MnO	0.01 - 100	TiO ₂	0.01 - 100
CaO	0.01 - 100	Na ₂ O	0.01 - 100	V ₂ O ₅	0.005 - 100
Fe ₂ O ₃	0.01 - 100	P ₂ O ₅	0.002 - 100	LOI 1000°C	0.01 - 100
K ₂ O	0.01 - 100	SiO ₂	0.01 - 100		
Li borate fusion / XRF			FB1/XRF235	Rp624,283	

Nickel Laterite Ores

The oxidised nature of nickel laterite ore and the low sulphur contents make XRF with a single point LOI an ideal technique for the chemical characterisation of these ores. XRF can accurately quantify the nickel and cobalt contents of the ore, important trace elements such as cobalt and zinc, as well as the major oxide components which are used to classify the laterite ore type. Nickel laterite ores can be hygroscopic with high moisture contents. Moisture is therefore corrected for routinely and all results are reported on a dry basis.

Nickel Laterite Ore Standard XRF Package

Element	Range %	Element	Range %	Element	Range %
Ni	0.01 - 25	Cr ₂ O ₃	0.005 - 10	P ₂ O ₅	0.002 - 15
Al ₂ O ₃	0.01 - 50	Fe ₂ O ₃	0.01 - 95	SiO ₂	0.01 - 100
CaO	0.01 - 55	MgO	0.01 - 50	TiO ₂	0.01 - 48
Co	0.005 - 5	MnO	0.01 - 30	LOI 1000°C	0.01 - 100
Li borate fusion / XRF			FB1/XRF240	Rp427,141	

Nickel Laterite Ore Extended XRF Package

Element	Range %	Element	Range %	Element	Range %
Ni	0.005 - 20	Cr ₂ O ₃	0.005 - 100	P ₂ O ₅	0.002 - 100
Al ₂ O ₃	0.01 - 100	Fe ₂ O ₃	0.01 - 100	SiO ₂	0.01 - 100
CaO	0.01 - 100	K ₂ O	0.01 - 100	SO ₃	0.002 - 100
Cl	0.002 - 2	MgO	0.01 - 100	TiO ₂	0.01 - 100
Co	0.005 - 5	MnO	0.01 - 100	Zn	0.005 - 2
Cu	0.005 - 2	Na ₂ O	0.01 - 100	LOI 1000°C	0.01 - 100
Li borate fusion / XRF			FB1/XRF241	Rp509,283	

Manganese Ore

XRF, with a single point LOI (1000°C), is routinely used in the accurate quantification of the chemical components of manganese ores. A complete suite is analysed which includes lead and barium. These two elements can be important components of the ore and the concentrations of these elements are required to do the requisite matrix corrections in the XRF analysis.

Manganese Ore XRF Package

Element	Range %	Element	Range %	Element	Range %
MnO	0.01 - 100	Fe ₂ O ₃	0.01 - 100	SiO ₂	0.01 - 100
Al ₂ O ₃	0.01 - 100	K ₂ O	0.01 - 100	S	0.002 - 2
BaO	0.01 - 100	MgO	0.01 - 100	TiO ₂	0.01 - 100
CaO	0.01 - 100	Na ₂ O	0.01 - 100	V ₂ O ₅	0.005 - 100
Cr ₂ O ₃	0.005 - 100	P ₂ O ₅	0.002 - 100	LOI 1000°C	0.01 - 100
Cu	0.005 - 2	Pb	0.005 - 2		
Li borate fusion / XRF			FB1/XRF225	Rp624,283	

Legend

Complete recovery for most samples

Near complete recovery for most samples

Not complete recovery

Industrial Minerals

XRF is a very useful technique for the analysis of diverse rock types and is the favored routine method for the full chemical characterisation of assorted industrial mineral feedstocks and products such as attapulgite, kaolinite, pyrophyllite, limestone, dolomite, phosphates, cement, mica and feldspar.

Clays, Limestones & Dolomites

Clay, Limestone & Dolomite XRF Package - suitable for samples containing <500ppm uranium.

Element	Range %	Element	Range %	Element	Range %
Al ₂ O ₃	0.01 - 100	MgO	0.01 - 100	S	0.002 - 2
CaO	0.01 - 100	MnO	0.01 - 100	TiO ₂	0.01 - 100
Cr ₂ O ₃	0.01 - 100	Na ₂ O	0.01 - 100	LOI 1000°C	0.01 - 100
Fe ₂ O ₃	0.01 - 100	P ₂ O ₅	0.002 - 100		
K ₂ O	0.01 - 100	SiO ₂	0.01 - 100		
Li borate fusion / XRF			FB1/XRF250	Rp427,141	
Li borate fusion / XRF			FB1/XRF260	Rp427,141	

Zircon Sand XRF Package

Element	Range %	Element	Range %	Element	Range %
ZrO ₂	0.01 - 100	HfO ₂	0.02 - 5	P ₂ O ₅	0.01 - 15
Zr	0.01 - 74	K ₂ O	0.01 - 5	SiO ₂	0.01 - 100
Al ₂ O ₃	0.01 - 29	MgO	0.01 - 25	TiO ₂	0.01 - 10
CaO	0.01 - 30	MnO	0.01 - 30	LOI 1000°C	0.01 - 100
Fe ₂ O ₃	0.01 - 30	Na ₂ O	0.01 - 3		
Li borate fusion / XRF			FB1/XRF256	Rp624,283	

Copper

A spectrum of analytical techniques are offered that add value to the copper industry supply chain. These include ultra-sensitive exploration methods, ore grade characterization and empirical digestion techniques that target copper in different forms. Acid soluble copper refers to the metal content extractable using dilute sulphuric acid. This includes the most common oxide copper species malachite, azurite and chrysocolla. Other copper minerals may also be partially dissolved. Cyanide soluble copper includes most oxide minerals, common sulphide minerals but not chalcocopyrite. These techniques are empirical in that the recovery depends on the conditions of the digest, the degree of comminution and the deportment of the metal in the ore. Total copper is offered by four acid digest. Umpire and commercial exchange assay services are available at Intertek's specialist LSI laboratory, see Minerals Trade Services.

Specialised Copper Methods

Element	Description	Range	Code	Price
Cu	Aqua regia digest / ICP-OES	1 - 1%	Cu-AR1/OE	Rp143,550
Cu	4 acid digest / ICP-OES for more complete digestion of complex matrices	1 - 2%	Cu-4A/OE	Rp207,350
Cu	Ore grade 4 acid digest / ICP-OES	5 - 70%	Cu-4AO/OE	Rp153,918
Cu	Assay for commercial settlement (Intertek LSI)	-		POA
Cu	Multi acid digest / short iodide titration	-	Cu-VOL	Rp717,750
Cu Acid Soluble	Acid soluble copper (options available)	Various	Cu-AS/OE	Rp89,320
Cu CN Soluble	Cyanide soluble copper (options available)	Various	Cu-CN	Rp73,370
Cu Sequential	Acid soluble followed by cyanide soluble copper	Various	Cu-SQ	Rp478,500

Individual Methods



Element	Description	Detection Limit	Code	Price
Hg	Specialised acid digest / cold vapour AAS	0.01ppm	HG1/CV	Rp131,588
FeO	Acid digestion / titration	0.1%	AD71/VOL	Rp542,300

Gravimetric Determinations

Element	Description	Detection Limit	Code	Price
LOD	Loss on drying (105°C or client nominated temperature)	0.01%	LOD/GR	Rp79,750
LOI	Loss on ignition (1000°C or client nominated temperatures)	0.01%	LOI/GR	Rp47,850
	Multiple temperatures each additional			Rp39,875

Carbon and Sulphur Analysis

Carbon and sulphur analyses using a variety of spectroscopic or gravimetric methods with the option of pretreatments for targeting specific forms of the analyte element.


Element	Description	Detection Limit	Code	Price
C,S	Total carbon & sulfur / CS analyser first element	0.01% - 50%	CSA03	Rp132,385
	/ per additional element			Rp27,115
C non carbonate	Weak acid digestion / CS analyser 0.01%	0.01% - 50%	C71/CSA	Rp175,450

Sulfur Speciation

Classification of the forms of sulfur present maybe required for certain metallurgical processes. The following method utilizes a carbonate leach to dissolve any soluble sulfate mineralisation and the residual sample is analysed for sulfur.

Element	Description	Detection Limit	Code	Price
S_SCIS	Carbonate Insoluble sulfur	0.01% - 70%	CSA104	Rp175,450

| Mineralogy

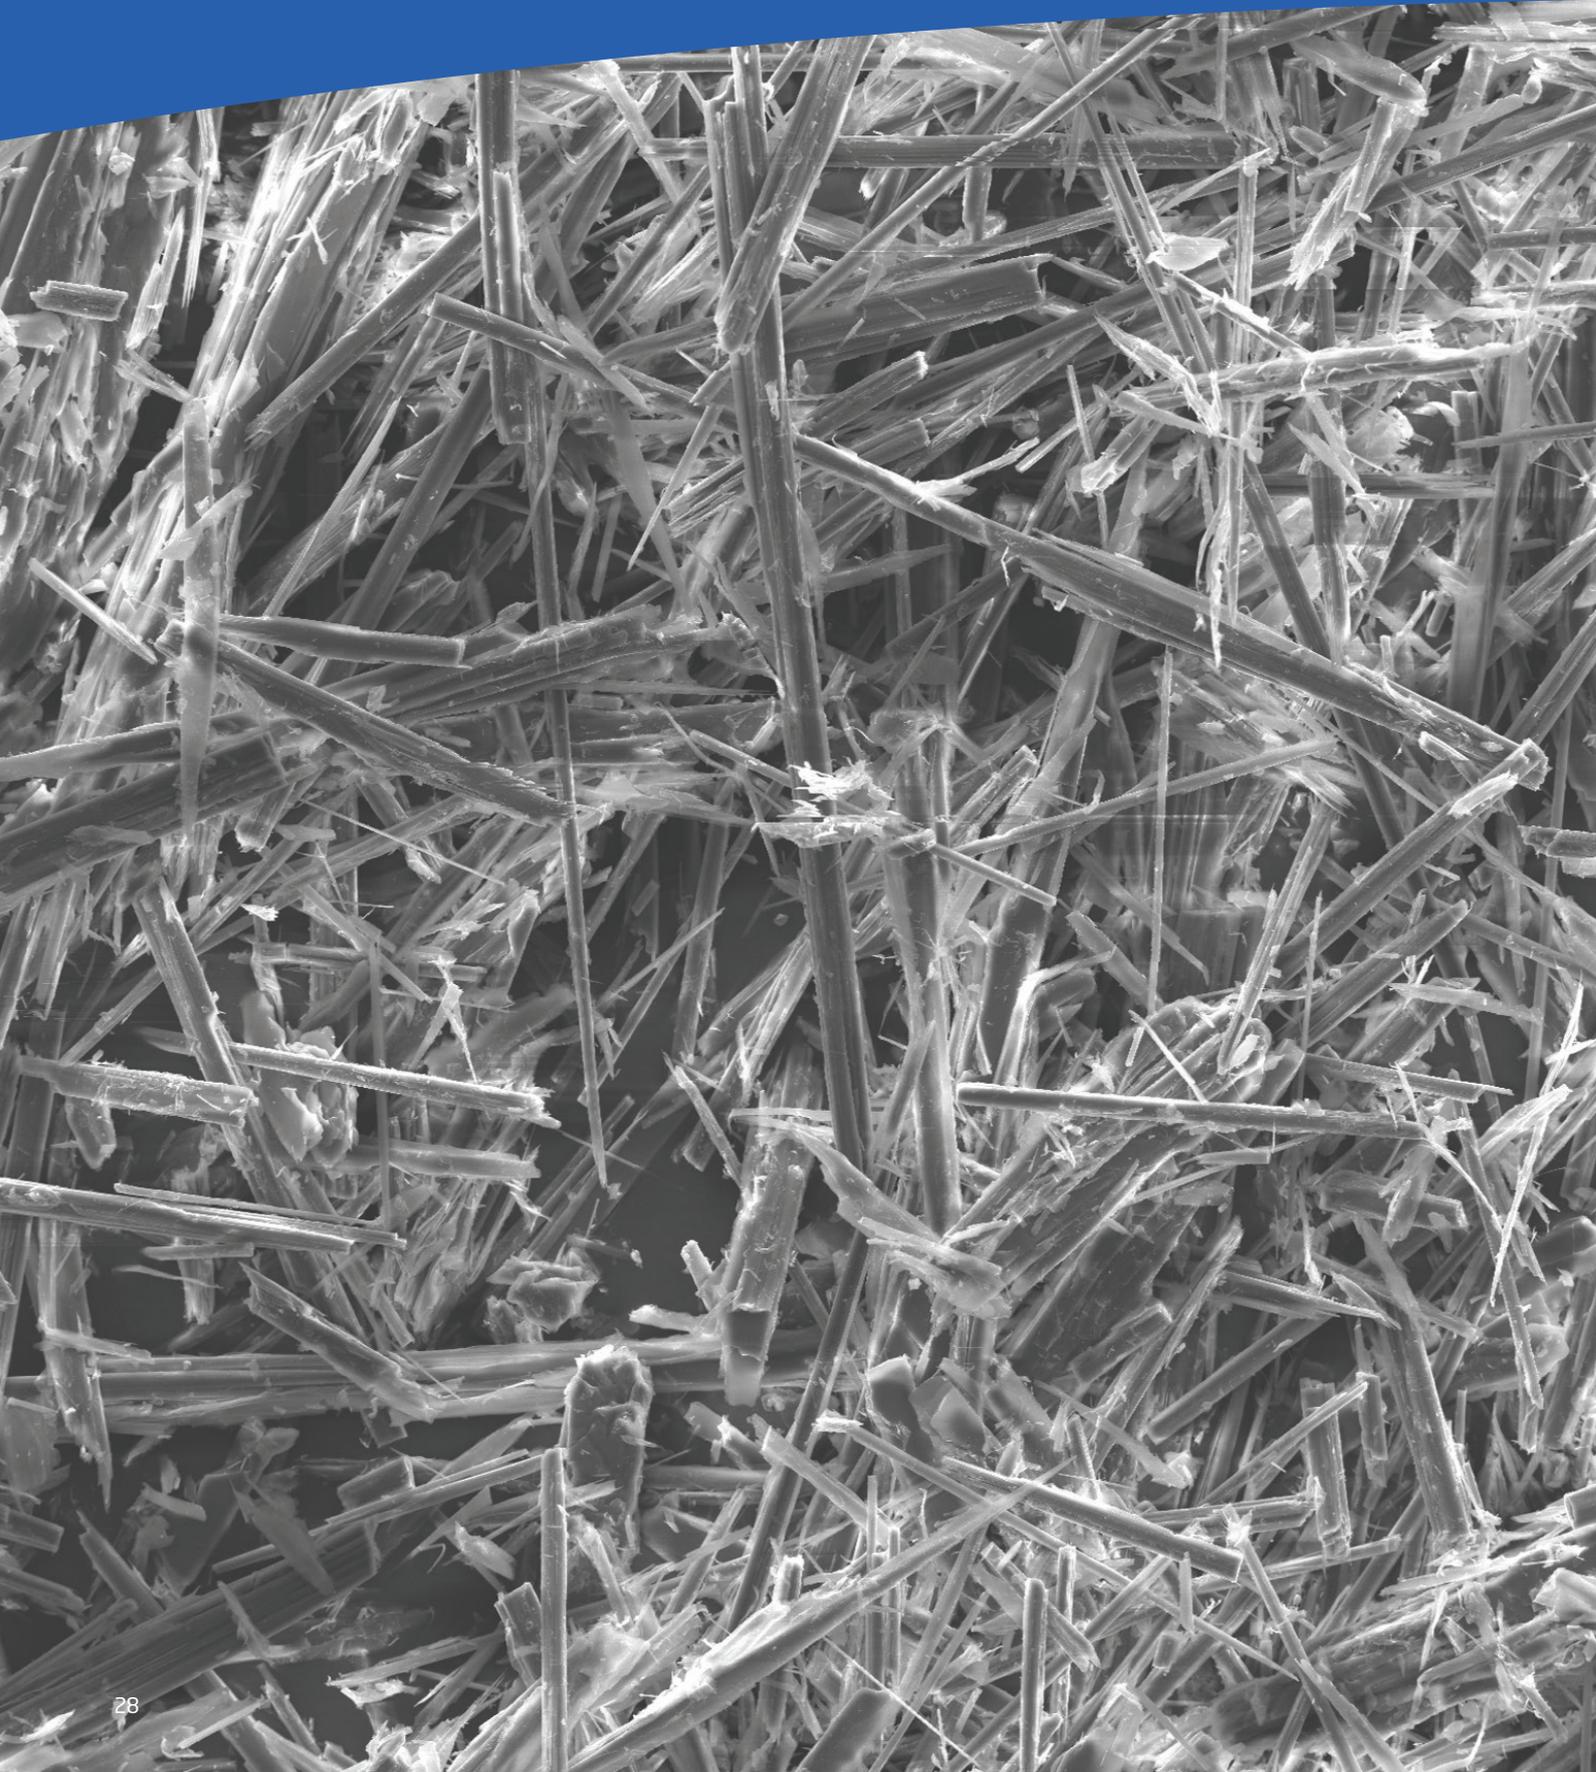

Mineralogy

Applied mineralogy is the study of the mineral phases of materials which contrasts with and complements a traditional chemical analysis. Applied mineralogy identifies the nature of the mineral phase, the grain size and morphology, textures, mineral associations and other parameters. Applied mineralogy has important applications in mineral exploration, mineral processing, mineral waste disposal and treatment, hydrometallurgy, pyrometallurgy and refining. It is also utilised in the oil and gas, coal and environmental industries.

Various ores and commodities can be analysed such as base metal ores, precious metal ores, iron ores, bauxite, chromite, nickel, uranium, rare earths, industrial minerals (including graphite), refractory minerals and clays.

A comprehensive suite of applied mineralogy analyses are available, however not all services are available at all locations. Please call our Perth laboratory to discuss the options best suited to your requirements with Intertek's XRD specialist.

Bulk Mineralogy

X-Ray Diffraction

Powder X-ray diffraction (XRD) is an analytical technique primarily employed for the identification and quantification of crystalline materials in bulk samples, both natural and synthetic.

The results given are either qualitative (descriptive of the sample make-up) or quantitative. Quantitative results can include the non-crystalline (amorphous) content of the sample.

Sample Preparation

XRD Crush and Pulverize Package

Description	Code	Price
Crush -2mm, rotary split 800g, pulverise 800g to < 60µm	XRD13	POA

*Samples are not to be dried

XRD Micronising Package

Description	Code	Price
Micronising	XRD14	POA

*Samples are not to be dried

XRD Crush, Pulverize and Micronize Package

Description	Code	Price
Crush -2mm, rotary split 800g, pulverise 800g to <60µm, micronise	XRD15	POA

*Samples are not to be dried

XRD Crush, Pulverize and Micronize Package

Description	Code	Price
Pulverise <800g to < 60µm, micronise	XRD16	POA

*Samples are not to be dried

X-Ray Diffraction Analysis

A number of qualitative and quantitative options are available. Please contact the laboratory to discuss your specific requirements.

Element	Description	Code	Price
QUALITATIVE	Qualitative analysis for complete mineralogy	XRDQual	POA
QUANTITATIVE	Quantitative analysis for complete mineralogy and amorphous content	XRDQuant01	POA
QUANTITATIVE	Quantitative analysis for complete mineralogy and amorphous content (double scan analysis - not appropriate for some sample types)	XRDQuant02	POA

Clay Mineralogy

Clays are important constituents of soils, mudstones, shales and some ores that often require specialist attention. A range of analytical tests are available, including:

- Clay separation from bulk materials
- Qualitative or quantitative XRD analysis from the bulk sample
- Clay mineral identification (XRD) (from glycolation and heating regimes)

XRD Clay separation

Description	Code	Price
Separation of clay fraction, <2 µm	CLAYF	POA
Separation of clay fraction, <2 µm, in iron-rich samples	CLAYFFe	POA

X-Ray Diffraction Analysis

Description	Code	Price	Price
QUALITATIVE	Qualitative analysis of clays (incl. glycolation and heating)	XRDQual01	POA

Infra-Red Spectroscopy

TerraSpec Near-Infrared Spectroscopy (NIR)

The TerraSpec 4 Hi Res spectrometer offers a rapid scan for the identification and characterisation of minerals visible in the NIR range. Minerals and mineral groups include haematite, goethite, garnet, pyroxene, amphibole, epidote, apatite, tourmaline, topaz, clay, mica, chlorite, serpentine, carbonates, hydrous silicates and rare earth minerals. The scan information can be used to identify, characterise and map alteration zones associated with various ore forming processes.

For best results, it is recommended that the characterisation of the mineral analysis be confirmed by XRD analysis on either a continuum or a selected subset of samples.

ASD Terraspec Scan

Description	Code	Price
TerraSpec 4 Hi Res scan	NIR	POA
TSG Post processing mineralogy report - standard report (includes scan)	NIRO1	POA
aiSIRIS™ Post processing mineralogy report - standard report (includes scan)	NIRO3	POA

Fourier-Transform Infrared Spectroscopy (FTIR)

Fourier-Transform Infrared Spectroscopy (FTIR) offers a rapid scan technique for the qualitative and quantitative analysis of organic and inorganic materials and minerals. Regression and calibration methods enable quantitative determination of mineralogy. This non-destructive technique requires minimal sample preparation.

Description	Code	Price
FTIR Scan	FTIR	POA
Quantitative determination	FTIRO2	POA

Micro Mineralogy

QEMSCAN

Automated mineralogy via QEMSCAN (Quantitative Evaluation of Minerals by Scanning Electron Microscopy) is used to identify mineral phases, in situ, at the micron scale on polished blocks or thin sections.

As well as identifying the minerals present, the processing of the data allows the visualisation of the textural and spatial arrangements of the minerals. The processing can thus determine grain sizes and shapes as well as provide information for mineral associations, mineral liberation, elemental deportment and elemental mapping.

The technique is best used in conjunction with the bulk mineralogical data obtained from XRD. Please contact us for options.

Additional Information



Sample Despatch

To assist with the efficient processing of your samples please email all assay instructions and any freight information prior to or at the time of despatch. Sample submissions received without written instructions cannot be processed until adequate written instructions are received from the client.

All discrepancies between submission sheets and actual samples received will be reported prior to commencement of the processing.

We recommend that all submissions of samples are clearly labelled and packaged in a concise and systematic order and are accompanied by accurate and detailed paperwork. To facilitate safe manual handling we would appreciate that samples be packaged in units not exceeding 25kg each. Sample submissions poorly labelled or packaged may incur additional sorting charges. Please "flag" the bag containing the paperwork.

Sample submission pads and pre-addressed stick-on labels are available upon request free of charge. A sample submission form is available from our web site. We offer an online submission service or the option to print a submission to be either emailed or faxed.

The minimum information required on any sample submission sheet is:

1. Client name
2. List or range of sample numbers
3. Sample preparation required
4. Elements required for analysis
5. Methods of analysis preferred
6. Result destination(s)
7. Electronic data format
8. Invoice destination
9. Sample storage requirements
10. Appropriate warnings if any samples are potentially hazardous
11. Indication of any samples that may cause problems during the preparation or analysis. This includes the presence of normally trace elements at percent levels, visible gold, graphitic shales, etc.

Certain samples may require classification as dangerous goods, for the purpose of transport, processing and storage. Compliance is the client's responsibility, please ensure that the samples have been classified, marked and transported in accordance with the requirements of dangerous goods legislation.

Your co-operation with sample submissions will eliminate unnecessary delays in turnaround.

Importation of Samples into Indonesia

Indonesia does not possess the same Quarantine import restrictions as found in Australia. However, correct procedures and paperwork must be submitted to minimise delays. Intertek Indonesia has an import licence and your local manager is able to assist clients with the necessary information.

When importing mineral samples into Indonesia from International sources the following document requirements are required; a Commercial Invoice and an Intertek Indonesia Sample Submission Form.

These documents may be downloaded from www.Intertek.com/minerals or by contacting the Jakarta Office.

Expenses related to the importation will be charged at cost. Intertek Indonesia does not guarantee that samples submitted will be cleared by Indonesian Customs.

Service Fees and Surcharges

Prices in this schedule are effective from 1st January 2023.

Intertek Indonesia applies a minimum invoice charge of Rp3,018,750 and a processing fee of Rp431,250 is also applicable.

When sample submissions include largely differing sample matrices and/or differing analytical requirements, they may be treated as separate submissions and multiple jobs may be generated for each discrete grouping, each possibly attracting minimum job fees or small batch size surcharges.

A waste disposal levy is applicable for samples which produce lead, alkaline or cyanide based solid or liquid waste that requires specific hazardous waste disposal protocols at Rp3,600 per sample. Should disposal costs increase prices may be increased accordingly.

Discounts may apply for large batches - please contact Intertek Indonesia to discuss your needs.

All prices quoted in this schedule are in Indonesian Rupiah, and exclude Indonesian VAT.

Quality Assurance

Regular participation in international, national and internal proficiency round robins and client specific proficiency programs complements KAN ISO 17025 accreditation ensuring international standards are maintained in the laboratories' procedures, methodology, validation, QA/QC and data handling.

Certified Reference Materials and/or in house controls, blanks and replicates are analysed with each batch of samples. These quality control results are reported along with the sample values in the final report. Selected samples are also re-analysed to confirm anomalous results. Prices include the reporting of all QC data except where more than 10% repeats are considered necessary in cases such as poor reproducibility due to particulate gold, in which case additional repeats may be charged for.

Where the concentration of an element exceeds the capacity of the original method selected, re-analysis will be required using a more appropriate technique at the client's expense.

Ethics and Compliance

Intertek is committed to maintaining the total confidence of its customers and shareholders. One of the Group's primary business objectives is to ensure both compliance with local, national and international laws and the accuracy and validity of reports and certificates that it provides to customers.

The foundations of the policy rest with the Group's employees, each of whom must comply with the company's Code of Ethics and Zero Tolerance policies outlining the high standards expected of them in all business dealings.

Our compliance aims:

- To avoid conflicts of interest and to act openly, responsibly and within the confines of the law and internationally accepted guidelines.
- To implement current 'best practice' policies in all control procedures.
- To maintain a culture in which all employees know what is expected of them.
- To monitor adherence to organisational controls and reporting procedures.
- Compliance is a core component of Intertek's business strategy to ensure high standards of professional conduct and ensure ethical behaviour and integrity of services.

Occupational Health & Safety

Intertek is also committed to the ongoing Health and safety of our employees. In accordance with this commitment, Intertek Indonesia is accredited for OHSAS 18001, ensuring international standards of Occupational Health and Safety are implemented including ongoing OHS training and health monitoring.

Value Added Services

Robotics and Automated Minerals Laboratory Systems

Intertek is the largest global commercial operator of automated and robotic mine site laboratories. Intertek automated and robotic sample systems are purpose built, ranging from individual cells to fully integrated systems, providing complete end-to-end sampling to analysis solutions. Using advanced robotic sample handling technology for minerals testing has distinct advantages, including rapid sample throughput, unparalleled consistency, exclusion of human error, a comprehensive audit trail, synchronised process control, reliability and fully programmable comminution parameters. Programmable parameters ensure that ores obtain the requisite treatment consistently. Robotic systems reduce OH&S exposure to employees, eliminating heavy lifting and isolating personnel from hazardous materials, significantly improving safety.

Minerals Trade Services

Intertek Minerals Trade Services provide independent inspection, sampling, testing and certification services which assist to protect the quantity and quality of mineral commodities to reduce commercial risk in the trading environment. Inspection and testing services are completed to appropriate international standards and procedures.

Non-ferrous commercial exchange assay services are provided by Intertek's industry recognised Laboratory Services International (LSI), based in Rotterdam, Netherlands. LSI is an established umpire laboratory providing analytical services to miners, traders and refiners with a long history of expertise in non-ferrous party and umpire analysis and is an industry leader for accuracy, service quality and independence.

The global Intertek Minerals Inspection Team also performs risk management and inspection services in load and discharge ports alike, offering a full scope of WSMD and party assays, in locations from the Americas, Africa to China and the Far East.

Mine and Port Site Laboratories

Intertek operates, designs and commissions dedicated mine site laboratories in remote locations to enhance its service to mining operations across multiple mineral commodities. Intertek provides clients with a complete solution for any scale of mine or port site laboratory installation, from concept phase to commissioning and ongoing management and operation.

Intertek's automated and robotic sample systems are purpose built, ranging from individual cells to fully integrated systems providing complete end-to-end sampling to analysis solutions. Intertek Robotic Laboratories (IRL) offers unmatched experience and expertise in the operation of fully automated laboratories in remote locations and is the largest commercial operator of fully automated laboratories globally.

Outsourcing of a mine-site laboratory offers the benefit of Intertek's world-class expertise and services and enables companies to focus resources and capital on their core business.

Mineralogy

Intertek's leading expertise and state-of-the-art facilities offer a range of mineralogical services. Technical specialists in XRF and XRD support local and global operations, producing quality reliable data with the reassurance of years of experience from onsite XRD specialists and instrumentation.

- Research quality lithogeochemical packages
- Applied bulk mineralogy
- Low cost XRF & spectral scanning
- TerraSpec Near-Infrared Spectroscopy
- FTIR Spectroscopy
- Applied Micro Mineralogy QEMSCAN

Minerals Environmental Testing Services

Intertek environmental laboratories support the minerals industry with water, soil and air testing to governmental, regulatory and industry standards.

- Water quality
- Sediment and soil analysis
- Acid sulphate soils
- Biological tissue analysis
- Waste analysis and characterisation
- Acid rock drainage prediction test
- Soil nutrient analysis

Total Sustainability. Assured.

Intertek is uniquely positioned to partner with our clients and meet their needs by delivering a wide variety of sustainability services that help them to manage risk and resilience with increased transparency and confidence, whilst supporting their ability to operate effectively and act responsibly. Intertek's Total Sustainability Assurance is a pioneering initiative that provides an end-to-end independent, systematic sustainability programme from both an operational and corporate perspective.

Intertek's Corporate Sustainability Certification programme, powered by our technical expertise and advanced software platforms, can help your organisation to authentically demonstrate and independently verify its commitment to sustainability across the entire value chain, building stakeholder trust and corporate value. Total Corporate Sustainability Certification is comprised of 10 comprehensive standards, aligned with the UN Sustainable Development Goals, that provide holistic quality, safety and sustainability assurance of operations, services and products, whilst fostering a culture of sustainability through awareness, training and engagement.



Production Services

Intertek's analytical and scientific services are focused on extending the longevity of plant and equipment and optimising operations.

- Oil Condition Monitoring
- Pipeline inspection and testing
- Refinery Representation and Superintending
- Fuel tank inspection and testing
- Tank/pump inspection and calibration
- Environmental chemistry

Business Assurance

Management systems auditing helps you find and implement best practices for continual improvement and adds strategic value to your business. Intertek's comprehensive auditing and certification services provide the tools you need to evaluate and continually improve your business processes.

As an accredited third-party registrar, we provide independent verification to ensure that your management system is effective in achieving your business objectives, while also certifying that it meets internationally recognised standards.

Industry Services

Intertek's Industry Services support the mining, oil and gas, power, construction, engineering, chemical and other heavy industries to manage operational risk and maximise returns. Applying leading inspection, testing, verification and monitoring practices, we assist clients to effectively manage product and process development, regulatory compliance, supply chain integrity and plant and asset maintenance.

- Technical Staffing Services (TSS)
- Technical Inspection Services (TIS)
- Intertek Surveying Services (ISS)
- Non-Destructive Testing (NDT)
- Asset Integrity Management (AIM)

Conversion Tables

Useful Chemical Conversion Factors

Element	Factor	Compound	Element	Factor	Compound	Element	Factor	Compound
Al	x 1.889	Al ₂ O ₃	Fe	x 1.43	Fe ₂ O ₃	Pb	x 1.155	PbS
As	x 1.32	As ₂ O ₃	Fe	x 1.574	FeS	Rb	x 1.094	Rb ₂ O
B	x 3.22	B ₂ O ₃	K	x 1.205	K ₂ O	Sb	x 1.197	Sb ₂ O ₃
Ba	x 1.699	BaSO ₄	La	x 1.173	La ₂ O ₃	Si	x 2.139	SiO ₂
Ba	x 1.117	BaO	Li	x 2.153	Li ₂ O	Sn	x 1.27	SnO ₂
Be	x 2.775	BeO	Mg	x 1.658	MgO	Sr	x 1.183	SrO
Ca	x 1.399	CaO	Mg	x 3.648	MgCO ₃	Ta	x 1.221	Ta ₂ O ₅
Ca	x 2.497	CaCO ₃	Mn	x 1.291	MnO	Th	x 1.138	ThO ₂
Ce	x 1.171	Ce ₂ O ₃	Mn	x 1.582	MnO ₂	Ti	x 1.668	TiO ₂
Co	x 1.271	CoO	Mo	x 1.5	MoO ₃	U	x 1.179	U ₃ O ₈
Cr	x 1.462	Cr ₂ O ₃	Mo	x 1.668	MoS ₂	V	x 1.785	V ₂ O ₅
Cs	x 1.06	Cs ₂ O	Na	x 1.348	Na ₂ O	W	x 1.261	WO ₃
Cu	x 1.252	CuO	Nb	x 1.432	Nb ₂ O ₅	Y	x 1.27	Y ₂ O ₃
Cu	x 1.252	Cu ₂ S	Ni	x 1.273	NiO	Zn	x 1.245	ZnO
F	x 2.055	CaF ₂	P	x 2.291	P ₂ O ₅	Zn	x 1.49	ZnS
Fe	x 1.287	FeO	Pb	x 1.077	PbO	Zr	x 1.351	ZrO ₂

Common Equivalents

PPM	PPB	%	GRAMS / METRIC TONNE
1	1,000	0.0001	1
10	10,000	0.001	10
100	100,000	0.01	100
1,000	1,000,000	0.1	1,000
10,000	10,000,000	1	10,000

Drill Core Specifications

DRILL CORE	DIAMETER (MM)	VOLUME PER METER (CM ³)		
		FULL	HALF	QUARTER
TT	35.0	960	480	240
BQ	36.4	1040	520	260
NQ	47.6	1780	890	445
HQ	63.5	3170	1585	793
BQ3	33.5	880	440	220
NQ3	45.1	1600	800	400
HQ3	61.1	2930	1465	733

Mass (g) = Volume/meter x SG x length (m)

Recommended Methods of Analysis For Low Grade Geological Materials



Element	Atomic Number	Atomic Weight	Primary Method	Secondary Method	Other Method
Hydrogen	1	1.0079			
Lithium	3	6.941			
Beryllium	4	9.0122			
Sodium	11	22.990			
Magnesium	12	24.305			
Potassium	19	39.098			
Calcium	20	40.078			
Scandium	21	44.956			
Titanium	22	47.867			
Vanadium	23	50.942			
Chromium	24	51.996			
Manganese	25	54.938			
Iron	26	55.845			
Cobalt	27	58.933			
Nickel	28	58.693			
Copper	29	63.546			
Zinc	30	65.38			
Gallium	31	69.723			
Germanium	32	72.64			
Arsenic	33	74.922			
Selenium	34	78.96			
Bromine	35	79.904			
Krypton	36	83.798			
Rubidium	37	85.468			
Sr	38	87.62			
Strontium	38	87.62			
Cesium	55	132.91			
Ba	56	137.33			
Barium	56	137.33			
Lanthanum	57	138.91			
La	57	138.91			
Actinium	89	227			
Ra	88	226			
Radium	88	226			
Francium	87	223			
Ac	89	227			
Rf	104	261			
Db	105	262			
Sg	106	266			
Bh	107	264			
Hs	108	277			
Mt	109	268			
Ds	110	269			
Rg	112	285			
Cn	112	285			
Gh	113	284			
Uut	113	284			
Fl	114	289			
Uuq	114	289			
Uup	115	288			
Uuh	116	289			
Uuq	116	289			
Uub	117	288			
Uus	117	288			
Uuq	118	289			
Uuo	118	289			
Uuq	119	288			
Uub	120	289			
Uut	121	288			
Uuq	122	289			
Uub	123	288			
Uut	124	289			
Uuq	125	288			
Uub	126	289			
Uut	127	288			
Uuq	128	289			
Uub	129	288			
Uut	130	289			
Uuq	131	288			
Uub	132	289			
Uut	133	288			
Uuq	134	289			
Uub	135	288			
Uut	136	289			
Uuq	137	288			
Uub	138	289			
Uut	139	288			
Uuq	140	289			
Uub	141	288			
Uut	142	289			
Uuq	143	288			
Uub	144	289			
Uut	145	288			
Uuq	146	289			
Uub	147	288			
Uut	148	289			
Uuq	149	288			
Uub	150	289			
Uut	151	288			
Uuq	152	289			
Uub	153	288			
Uut	154	289			
Uuq	155	288			
Uub	156	289			
Uut	157	288			
Uuq	158	289			
Uub	159	288			
Uut	160	289			
Uuq	161	288			
Uub	162	289			
Uut	163	288			
Uuq	164	289			
Uub	165	288			
Uut	166	289			
Uuq	167	288			
Uub	168	289			
Uut	169	288			
Uuq	170	289			
Uub	171	288			
Uut	172	289			
Uuq	173	288			
Uub	174	289			
Uut	175	288			
Uuq	176	289			
Uub	177	288			
Uut	178	289			
Uuq	179	288			
Uub	180	289			
Uut	181	288			
Uuq	182	289			
Uub	183	288			
Uut	184	289			
Uuq	185	288			
Uub	186	289			
Uut	187	288			
Uuq	188	289			
Uub	189	288			
Uut	190	289			
Uuq	191	288			
Uub	192	289			
Uut	193	288			
Uuq	194	289			
Uub	195	288			
Uut	196	289			
Uuq	197	288			
Uub	198	289			
Uut	199	288			
Uuq	200	289			
Uub	201	288			
Uut	202	289			
Uuq	203	288			
Uub	204	289			
Uut	205	288			
Uuq	206	289			
Uub	207	288			
Uut	208	289			
Uuq	209	288			
Uub	210	289			
Uut	211	288			
Uuq	212	289			
Uub	213	288			
Uut	214	289			
Uuq	215	288			
Uub	216	289			
Uut	217	288			
Uuq	218	289			
Uub	219	288			
Uut	220	289			
Uuq	221	288			
Uub	222	289			
Uut	223	288			
Uuq	224	289			
Uub	225	288			
Uut	226	289			
Uuq	227	288			
Uub	228	289			
Uut	229	288			
Uuq	230	289			
Uub	231	288			
Uut	232	289			
Uuq	233	288			
Uub	234	289			
Uut	235	288			
Uuq	236	289			
Uub	237	288			
Uut	238	289			
Uuq	239	288			
Uub	240	289			
Uut	241	288			
Uuq	242	289			
Uub	243	288			
Uut	244	289			
Uuq	245	288			
Uub	246	289			
Uut	247	288			
Uuq	248	289			
Uub	249	288			
Uut	250	289			
Uuq	251	288			
Uub	252	289			
Uut	253	288			
Uuq	254	289			
Uub	255	288			
Uut	256	289			
Uuq	257	288			
Uub	258	289			
Uut	259	288			
Uuq	260	289			
Uub	261	288			
Uut	262	289			
Uuq	263	288			
Uub	264	289			
Uut	265	288			
Uuq	266	289			
Uub	267	288			
Uut	268	289			
Uuq	269	288			
Uub	270	289			
Uut	271	288			
Uuq	272	289			
Uub	273	288			
Uut	274	289			
Uuq	275	288			
Uub	276	289			
Uut	277	288			
Uuq	278	289			
Uub	279	288			
Uut	280	289			
Uuq	281	288			
Uub	282	289			
Uut	283	288			
Uuq	284	289			
Uub	285	288			
Uut	286	289			
Uuq	287	288			
Uub	288	289			
Uut	289	288			
Uuq	290	289			
Uub	291	288			
Uut	292	289			
Uuq	293	288			
Uub	294	289			
Uut	295	288			
Uuq	296	289			
Uub	297	288			
Uut	298	289			
Uuq	299	288			
Uub	300	289			
Uut	301	288			
Uuq	302	289			
Uub	303	288			
Uut	304	289			
Uuq	305	288			
Uub	306	289			
Uut	307	288			
Uuq	308	289			
Uub	309	288			
Uut	310	289			
Uuq	311	288			
Uub	312	289			
Uut	313	288			
Uuq	314	289			
Uub	315	288			
Uut	316	289			
Uuq	317	288			
Uub	318	289			
Uut	319	288			
Uuq	320	289			
Uub	321	288			
Uut	322	289			
Uuq	323	288			
Uub	324	289			
Uut	325	288			
Uuq	326	289			
Uub	327	288			
Uut	328	289			
Uuq	329	288			
Uub	330	289			
Uut	331	288			
Uuq	332	289			
Uub	333	288			
Uut	334	289			
Uuq	335	288			
Uub	336	289			
Uut	337	288			
Uuq	338	289			
Uub	339	288			
Uut	340	289			
Uuq	341	288			
Uub	342	289			
Uut	343	288			
Uuq	344	289			
Uub	345	288			
Uut	346	289			
Uuq	347	288			
Uub	348	289			
Uut	349	288			
Uuq	350	289			
Uub	351	288			
Uut	352	289			
Uuq	353	288			
Uub	354	289			
Uut	355	288			
Uuq	356	289			
Uub	357	288			
Uut	358	289			
Uuq	359	288			
Uub	360	289			
Uut	361	288			
Uuq	362	289			

Intertek Minerals Services Terms and Conditions (2023)

- 1.0 1.0 Unless otherwise specifically agreed in writing Intertek Minerals (hereinafter called "the Company") undertakes services in accordance with these general conditions (hereinafter called "General Conditions") and accordingly all offers or tenders of service are made subject to these General Conditions. All resulting contracts, agreements or other arrangements will in all respects be governed by these General Conditions, except only to the extent that the law of the place where such arrangements or contracts are made or carried out shall preclude any of the General Conditions and in such case such local law shall prevail wherever, but only to the extent that, it is at variance with these General Conditions.
- 1.1 For the purposes of these conditions the term "Intertek Minerals" comprises all of the Intertek subsidiaries carrying out Minerals testing and inspection activities including but not limited to Intertek, Intertek Minerals, Intertek Genalysis, Intertek Testing Services (Australia) Pty Ltd, Intertek Robotic Laboratories Pty Ltd, (IRL), PT Intertek Utama Services (IUS), ITS (PNG) Ltd, Genalysis Laboratory Services Pty Ltd, Intertek Genalysis South Africa Pty Ltd, Intertek NTEL, Intertek Minerals Limited, Intertek Testing Services Philippines Inc, Intertek Genalysis Namibia (Pty) Ltd, Intertek International Tanzania Ltd, ITS West Africa, Intertek Commodities Botswana, Intertek Genalysis (Zambia) Ltd, Intertek Genalysis SI Ltd, Intertek LSI, Laboratory Services International Rotterdam B.V.
- 2.0 The Company is an enterprise engaged in the trade of inspection and testing. As such, it:
- 2.1 carries out such standard services as are referred to in General Condition 6;
- 2.2 renders advisory and special services as may be agreed by the Company and as referred to in General Condition 7; and
- 2.3 issues reports and/or certificates as referred to in General Condition 8.
- 3.0 The Company acts for the persons or bodies from whom the instructions to act have originated (hereinafter called "the Principal"). No other party is entitled to give instructions, particularly on the scope of inspection or delivery of report or certificate, unless so authorized by the Principal and agreed by the Company. The Company will however be deemed irrevocably authorized to deliver at its discretion the report or the certificate to a third party if following instructions by the Principal a promise in this sense had been given to this third party or such a promise implicit follows from circumstances, trade custom, usage or practice.
- 4.0 The Company will provide services in accordance with:
- 4.1 the Principal's specific instructions as confirmed by the Company;
- 4.2 the terms of the Company's Standard Order Form, Sample Submission Form and/or Standard Specification Sheet if used;
- 4.3 any relevant trade custom, usage or practice; and
- 4.4 such methods as the Company shall consider appropriate on technical, operational and/or financial grounds.
- 5.0 5.1 All enquiries and orders for the supply of services must be accompanied by sufficient information specifications and instructions to enable the Company to evaluate and/or perform the services required.
- 5.2 Documents reflecting engagements contracted between the Principal and third parties, or third parties' documents, such as copies of contracts of sale, letters of credit, bills of lading, etc., are (if received by the Company) considered to be for information only, without extending or restricting the mission or obligations accepted by the Company.
- 6.0 The Company's standard services may include all or any of the following:
- 6.1 quantitative and/or qualitative inspection;
- 6.2 inspection of goods, plant, equipment, packing, tanks, containers and means of transport;
- 6.3 inspection of loading or discharging;
- 6.4 sampling;
- 6.5 laboratory analysis or other testing; and
- 6.6 surveys and audits.
- 7.0 Special services where the same exceed the scope of standard services as referred to in General Condition 6 will only be undertaken by the Company by particular arrangement. Such special services are illustratively not exhaustively:
- 7.1 qualitative and/or quantitative guarantees;
- 7.2 supply of technicians and other personnel;
- 7.3 pre-shipment inspection under government mandated import or customs schemes; and
- 7.4 advisory services.
- 8.0 8.1 Subject to the Principal's instructions as accepted by the Company, the Company will issue reports and certificates of inspection which reflect statements of opinion made with due care within the limitation of instructions received but the Company is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received.
- 8.2 Reports or certificates issued following testing or analysis of samples contain the Company's specific opinion on those samples as received only but do not express any opinion upon the bulk from which the samples were drawn. If an opinion on the bulk is requested special arrangements must be made in advance with the Company for the inspection and sampling of the bulk.
- 8.3 Upon payment of the total sum due to the Company by the Principal, the Principal shall have a perpetual, irrevocable, fully paid up and royalty free licence to use the final report or certificate. The Company shall own all analysis, data and intellectual property generated pursuant to the creation of the report or certificate.
- 9.0 The Principal will:
- 9.1 ensure that instructions to the Company and sufficient information are given in due time to enable the required services to be performed effectively;
- 9.2 procure all necessary access for the Company's representatives to enable the required services to be performed effectively;
- 9.3 supply, if required, any special equipment and personnel necessary for the performance of the required services;
- 9.4 ensure that all necessary measures are taken for safety and security of working conditions, sites and installations during the performance of services and will not rely, in this respect, on the Company's advice whether requested or not;
- 9.5 take all necessary steps to eliminate or remedy any obstruction to or interruptions in the performance of the required services;
- 9.6 inform the Company in advance of any known hazards or dangers, actual or potential, associated with any order or samples or testing including, for example, presence or risk of radiation, toxic or noxious or explosive elements or materials, environmental pollution or poisons; and
- 9.7 fully exercise all its rights and discharge all its liabilities under any related contract whether or not a report or certificate has been issued by the Company failing which the Company shall be under no obligation to the Principal.

- 10.0 The Company shall be entitled at its discretion to delegate the performance of the whole or any part of the services contracted for with the Principal to any agent or subcontractor. Where deemed appropriate by the company, prior consent will be sought from the Principal.
- 11.0 If the requirements of the Principal necessitate the analysis of samples by the Principal's or by any third party's laboratory the Company will pass on the result of the analysis but without responsibility for its accuracy. Likewise where the Company is only able to witness an analysis by the Principal's or by any third party's laboratory the Company will provide confirmation that the correct sample has been analysed but will not otherwise be responsible for the accuracy of any analysis or results.
- 12.0 12.1 The Company undertakes to exercise due care and skill in the performance of its services and accepts responsibility only where such skill and care is not exercised.
- 12.2 All samples submitted to the Company remain the property of the Principal. The Company shall not be liable for any claim whatsoever relating to deterioration, contamination, damage or loss of samples. The Principal indemnifies the Company against any claims or legal action resulting from damage, deterioration or loss of samples.
- 12.3 The liability of the Company in respect of any claims for loss, damage or expense of whatsoever nature and howsoever arising in respect of any breach of contract and/or any failure to exercise due skill and care by the Company shall in no circumstances exceed a total aggregate sum equal to Fifteen (15) times the amount of the fee or commission paid or payable in respect of the specific service or test required under the particular contract with the Company which gives rise to such claims, or US\$15,000, whichever is least, provided however that the Company shall have no liability in respect of any claims for indirect or consequential loss including loss of profit and/or loss of future business and/or loss of production and/or cancellation of contracts entered into by the Principal. Where the fee or commission payable relates to a number of services and a claim arises in respect of one of those services the fee or commission may be apportioned for the purposes of this paragraph by reference to the estimated time involved in the performance of each service or the value of the individual services.
- 12.4 The limit of liability of the Company under the terms of Condition 12.2 may be increased upon request received by the Company in advance of the performance of the service to such figure as agreed in writing.
- 13.0 The Principal shall guarantee, hold harmless and indemnify the Company and its officers, employees, agents or subcontractors against all claims made by any third party for loss, damage or expense of whatsoever nature and howsoever arising relating to the performance, purported performance or non-performance of any services to the extent that the aggregate of any such claims relating to any one service exceed the limit mentioned in Condition 12.
- 14.0 Every officer, employee, agent or subcontractor of the Company shall have the benefit of the limitation of compensation and the indemnity contained in these General Conditions and so far as relates to such limitations any contract entered into by the Company is entered into not only on its own behalf but also as agent and trustee for every such person as aforesaid.
- 15.0 In the event that any unforeseen problems or expenditure arise in the course of carrying out any of the contracted services the Company shall be entitled to make reasonable additional charges to cover additional time and cost necessarily incurred to complete the service.
- 16.0 16.1 The Principal will punctually pay not later than Thirty (30) days after the relevant invoice date or upon receipt of invoice where credit is not extended or a credit limit is exceeded or within such other period as may have been agreed in writing by the Company all proper charges rendered by the Company failing which interest will become due at the rate of Eighteen per cent (18%) per annum or one and a half percent (1.5%) per month from the date of invoice until payment.
- 16.2 The Principal shall not be entitled to retain or defer payment of any sums due to the Company on account of any dispute, cross claim or set off which it may allege against the Company.
- 16.3 In the event of any suspension of payment arrangement with creditors, bankruptcy, insolvency, receivership or cessation of business by the Principal, or failure by the Principal to meet payment obligations in this clause 16 the Company shall be entitled to suspend all further performance of its services forthwith and without liability.
- 17.0 In the event of the Company being prevented by reason of any cause whatsoever outside the Company's control from performing or completing any service for which an order has been given or an agreement made, the Principal will pay to the Company:
- 17.1 the amount of all abortive expenditure actually made or incurred; and
- 17.2 a proportion of the agreed fee or commission equal to the proportion (if any) of the service actually carried out and the Company shall be relieved of all responsibility whatsoever for the partial or total non-performance of the required service.
- 18.0 The Company shall be discharged from all liability to the Principal for all claims for loss, damage or expense unless suit is brought within twelve (12) months after the date of the performance by the Company of the service which gives rise to the claim or in the event of any alleged non-performance within three (3) months of the date when such service should have been completed.
- 19.0 The Company is neither an insurer nor a guarantor and disclaims all liability in such capacity. Principals seeking a guarantee against loss or damage should obtain appropriate insurance.
- 20.0 No alteration, amendment or waiver of any of these General Conditions shall have any effect unless made in writing and signed by an officer of the Company
- 21.0 Upon completion of testing the Company shall provide a report to the Principal on the results of the testing. Where requested by the Principal provisional results may be provided however the Principal agrees that those results shall be subject to confirmation in a final report.
- 22.0 The Company agrees to take reasonable measures to ensure that the results of Inspection or Testing on behalf of the Principal and any other information provided to the Company are kept confidential provided that this provision will not apply where the results or other information are in the public domain.
- 23.0 The Company shall have no responsibility for any action or inaction of any carrier, shipping or delivering any sample to or from the Company premises.
- 24.0 Samples shall be stored free of charge for a period of sixty (60) days after provision of the invoice. Upon expiration of the free storage period, unless otherwise directed by the Principal storage fees and/or disposal charges shall apply.
- 25.0 All data will be retained for a seven (7) year period; fees may apply for retrieval of data if longer than three (3) months after the final report date.



Global Locations

Asia Pacific

Indonesia

Jakarta Minerals Head Office and Laboratory

Tel: +62 21 2938 4454 | Email: indo.office@intertek.com

Jakarta Environmental Laboratory

Tel: +62 21 2938 4454 | Email: min.idn.jkt@intertek.com

Medan (North Sumatera) Sample Preparation Facility

Tel: +62 61 7781 4546 | Email: min.idn.jkt@intertek.com

Sumbawa (West Nusa Tenggara) Sample Preparation Facility

Tel: +62 811 8498 709 | Email: min.idn.jkt@intertek.com

Manado (North Sulawesi) Sample Preparation Facility

Tel: +62 431 815431 | Email: min.idn.jkt@intertek.com

Kendari (SE Sulawesi) Inspection and Sample Preparation Facility

Tel: +62 811 8498 710 | Email: min.idn.jkt@intertek.com

Australia

Intertek Genalysis

Perth Minerals Head Office and Laboratory

544 Bickley Road, Maddington, Western Australia 6109

Tel: +61 8 9263 0100 | Email: min.aus.per@intertek.com

Sample Deliveries: 311 Kenwick Road, Maddington,

Western Australia 6109

Intertek Robotic Laboratories

Tel: +61 8 9251 8100 | Email: min.aus.irl@intertek.com

Kalgoorlie Sample Preparation Facility

12 Keogh Way, Kalgoorlie, Western Australia 6430

Tel: +61 8 9021 6057 | Email: min.aus.kal@intertek.com

Port Hedland Inspection and Sample Preparation

116 Pinnacles Street Wedgefield, Western Australia 6721

Tel: +61 8 9172 4288 | Email: hedland@intertek.com

Adelaide Laboratory

11 Senna Road, Wingfield, South Australia 5013

Tel: +61 8 8162 9714 | Email: min.aus.adl@intertek.com

Townsville Laboratory

9-23 Kelli Street, Bohle, Queensland 4818

Tel: +61 7 4774 3655 | Email: min.aus.tsv@intertek.com

Darwin Laboratory (NTEL)

55 Export Drive, East Arm, Northern Territory 0822

Tel: +61 8 8947 0510 | Email: ntel@intertek.com

Alice Springs Sample Preparation Facility

41 Ghan Rd, Alice Springs, Northern Territory, 0870

Tel: +61 8 8952 3938 | Email: min.aus.asp@intertek.com

China

Shanghai Head Office & Coal Laboratory

Tel: +86 21 6127 6288 | Email: adam.huang@intertek.com

Tianjin Mineral and Coal Laboratory

Tel: +86 22 2532 7795 | Email: roy.zhang@intertek.com

Urumqi Sample Preparation Facility

Tel: +86 1509916 7729 | Email: hongchang.wang@intertek.com

Qingdao Inspection and Sample Preparation Facility

Tel: +86 13805326726 | Email: stephen.liu@intertek.com

Ningde Inspection and Sample Preparation Facility

Tel: +86 13503064504 | Email: frankie.fan@intertek.com

Zhanjiang Inspection and Sample Preparation Facility

Tel: +86 13503064504 | Email: ice.liu@intertek.com

Guangzhou Coal Laboratory

Tel: +86 2028206006 | Email: david.chen@intertek.com

Lianyungang Office and Inspection

Tel: +86 15062910451 | Email: henry.hu@intertek.com

Rizhao Office and Inspection

Tel: +86 18905326726 | Email: stephen.lui@intertek.com

Papua New Guinea

LAE Laboratory

Tel: +675 472 8113 | Email: min.png.lae@intertek.com

Philippines

Manila Minerals Head Office and Laboratory

Tel: +63 2 8423464 | Email: min.apac.ph.lab@intertek.com

Surigao Sample Preparation Facility

Tel: +63 928 507 9224 | Email: min.apac.ph.lab@intertek.com

South Korea

Seoul Inspection and Head Office

Tel: +82 2 860 0271 | Email: raymond.sohn@intertek.com

Thailand

Bangkok Head Office

Tel: +66 (2) 279 5040 | Email: wilai.suphasin@intertek.com

North and South America

Brazil

Nova Lima Minerals Office

Tel: +55 31 3581-8854 | Email: fernanda.moreiran@intertek.com

Canada

Vancouver Coal Laboratory

Tel: +1 604 454 9011 | Email: vancouver.ops@intertek.com

Prince Rupert Coal Laboratory

Tel: +1 604 454 9011 | Email: vancouver.ops@intertek.com

Thunder Bay Coal Inspection and Sample Preparation

Tel: +1 807 345 5392 | Email: peggy.brown@intertek.com

Montreal Coal Inspection and Sample Preparation

Tel: +1 517 640 6332 | Email: .operationsmtl@intertek.com

USA

Chicago Coal Laboratory

Tel: +1 815 221 5002 | Email: cbwchicago@intertek.com

Detroit Zug Island Coal Laboratory

Tel: +1 313 849 5527 | Email: zugislandlab@intertek.com

New Orleans NOLA Coal Sample Preparation Facility

Tel: +1 504 602 2100 | Email: mineralsUSA@intertek.com

Shenango Pittsburgh Coal Laboratory

Tel: +1 412 771 0973 | Email: nevllleislandlab@intertek.com

St Louis Coal Sample Preparation Facility

Tel: +1 314 869 7878 | Email: mineralsUSA@intertek.com

Europe, the Middle East and Africa

Eritrea

Adi Guadad, Eritrea Sample Preparation Facility

Tel: +291 7 290 945 | Email: min.eri.asm@intertek.com

Ghana

Tarkwa Laboratory

Tel: +233 (0)312 320 386 | Email: min.gha.tkw@intertek.com

Netherlands

LSI Rotterdam Laboratory

Tel: +31 10 495 48 09 | Email: info@lsi-assays.com

South Africa

Johannesburg Laboratory

Tel: +27 11 964 1004 | Email: min.zaf.jhb@intertek.com

Zambia

Chingola Sample Preparation Facility

Tel +260 212 310 680 | Email: min.zam.cgj@Intertek.com

Inspection Services are available at all major ports & distribution centres. website on up to date information on locations, services and fact sheets www.intertek.com/minerals/



intertek

intertek.com

intertek
minerals